


# BS6883 EPR/SW4 EARTH

## 600/1000V

HALOGEN FREE, FLAME RETARDANT, EARTH CABLE

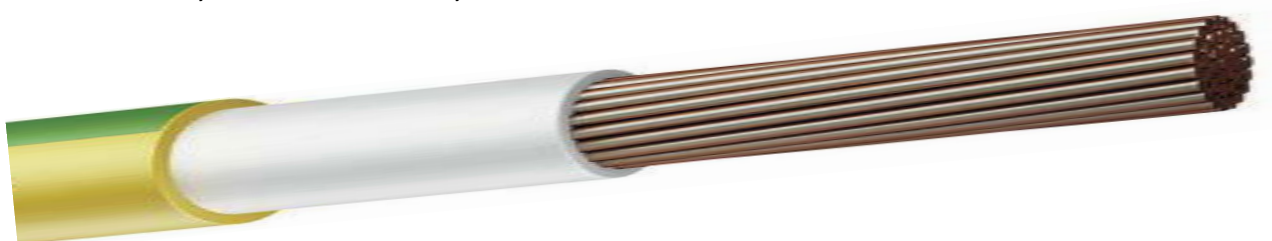

### CABLE DESCRIPTION

Tinned Copper Class 2 Conductors, EPR insulated, LSOH (SW4) GREEN/YELLOW ; BS6883; IEC60754 1-2 ; IEC60754 1-2 ; IEC61034 1-2; IEC60332-1 IEC60332-3 CAT A

### APPLICATION

Unarmoured earth cable used for fixed installations in all areas and on open deck in ships and offshore

CSWL Part No	No Cores	Size mm <sup>2</sup>	OD (mm) Nominal	Weight KG/KM	UKOOA CODE
CSW4MM1CEARTH	1	4	6.5	78	WE104
CSW6MM1CEARTH	1	6	7.1	101	WE106
CSW10MM1CEARTH	1	10	8.1	144	WE110
CSW16MM1CEARTH	1	16	9.5	216	WE116
CSW25MM1CEARTH	1	25	11.4	328	WE125
CSW35MM1CEARTH	1	35	12.6	429	WE135
CSW50MM1CEARTH	1	50	14.3	551	WE150
CSW70MM1CEARTH	1	70	16.0	753	WE170
CSW95MM1CEARTH	1	95	18.6	1049	WE195
CSW120MM1CEARTH	1	120	20.3	1274	WE10A
CSW150MM1CEARTH	1	150	22.4	1568	WE10B
CSW185MM1CEARTH	1	185	24.9	1949	WE10C
CSW240MM1CEARTH	1	240	28.0	2530	WE10D
CSW300MM1CEARTH	1	300	30.9	3134	WE10E

A Dron & Dickson Group Company

**Cable Solutions**

WORLDWIDE